查询F970G106MBA供应商

F97

Resin-molded Chip,
High Reliability
(High temperature / moisture resistance) Series

For SMD　Long Life

● Adapted to the RoHS directive (2002/95/EC).

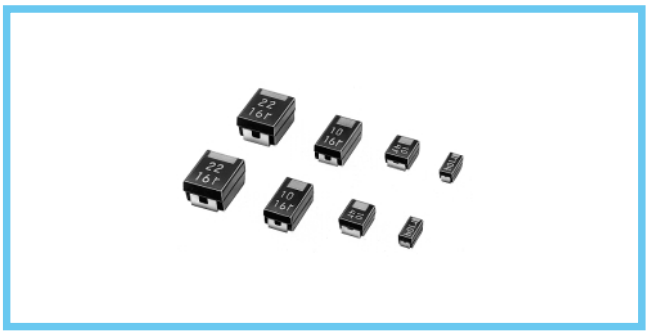

■ Type numbering system (Example : 16V 3.3 µF)

1	2	3	4	5	6	7	8	9	10	11
F	9	7	1	C	3	3	5	M	B	

Taping code (Refer to page 267 for details)
Case code
Capacitance tolerance
Rated Capacitance
Rated voltage
Series

■ Drawing

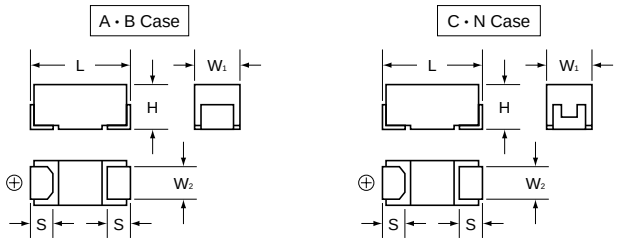

■ Dimensions

(mm)

Case code	L	W1	W2	H	S
A	3.2 ± 0.2	1.6 ± 0.2	1.2 ± 0.1	1.6 ± 0.2	0.8 ± 0.2
B	3.5 ± 0.2	2.8 ± 0.2	2.2 ± 0.1	1.9 ± 0.2	0.8 ± 0.2
C	6.0 ± 0.2	3.2 ± 0.2	2.2 ± 0.1	2.5 ± 0.2	1.3 ± 0.2
N	7.3 ± 0.2	4.3 ± 0.2	2.4 ± 0.1	2.8 ± 0.2	1.3 ± 0.2

■ Marking

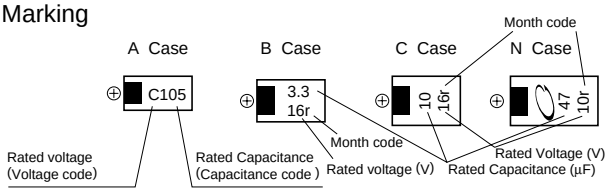

■ Standard ratings

Cap. (µF) \ V	Code	4	6.3	10	16	20	25	35
		0G	0J	1A	1C	1D	1E	1V
0.33	334							A
0.47	474						A	A
0.68	684					A	A	A
1	105				A	A	A	B
1.5	155			A	A	A	B	B
2.2	225		A	A	A	B	B	B
3.3	335	A	A	A	B	B	B	C
4.7	475	A	A	B	B	B	C	C
6.8	685	A	B	B	B	C	C	N
10	106	B	B	B	C	C	C・N	N
15	156	B	B	C	C	N	N	
22	226	B	C	C	C・N	N		
33	336	C	C	C・N	N			
47	476	C	C・N	N				
68	686	C・N	N					
100	107	N	N					
150	157	N						

■ Specifications

Item	Performance Characteristics
Category Temperature Range	−55 ~ +125˚C (Rated temperature : 85˚C.)
Capacitance Tolerance	± 20%, ± 10% (at 120Hz)
Dissipation Factor	Refer to next page
ESR (100kHz)	Refer to next page
Leakage Current*	• After 1 minute' s application of rated voltage,leakage current at 20˚C is not more than 0.01CV or 0.5µA, whichever is greater. • After 1 minute' s application of rated voltage,leakage current at 85˚C is not more than 0.1CV or 5µA,whichever is greater. • After 1 minute' s application of derated voltage,leakage current at 125˚C is not more than 0.125CV or 6.3µA,whichever is greater.
Capacitance Change by Temperature	+15% Max. (at +125˚C) +10% Max. (at +85˚C) −10% Max. (at −55˚C)
Damp Heat	At 85˚C, 85% R.H.,For 1000 hours (No voltage applied) Capacitance Change ····· Within ±10% of initial value Dissipation Factor ····· Initial specified value or less Leakage Current ····· 125% or less of initial specified value
Load Humidity	After 500 hour' s application of rated voltage in series with a 33Ω resistor at 60˚C,90~95% R.H.,capacitors meet the characteristics requirements listed below. Capacitance Change ····· Within ±10% of initial value Dissipation Factor ····· Initial specified value or less Leakage Current ····· 125% or less of initial specified value
Temperature Cycles	At −55˚C / +125˚C,For 30 minutes each,1000 cycles Capacitance Change ····· Within ± 5% of initial value Dissipation Factor ····· Initial specified value or less Leakage Current ····· Initial specified value or less
Resistance to Soldering Heat	At 260˚C,reflowing capacitors for 10 seconds Max. Capacitance Change ····· Within ± 5% of initial value Dissipation Factor ····· Initial specified value or less Leakage Current ····· Initial specified value or less
Solderability	After immersing capacitors completely into a solder pot at 245˚C for 2~3 seconds,more than 3/4 of their electrode area shall remain covered with new solder.
Surge*	After application of surge in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF,for 1000 successive test cycles at 85˚C,capacitors meet the characteristics requirements listed below. Capacitance Change ····· Within ± 5% of initial value Dissipation Factor ····· Initial specified value or less Leakage Current ····· Initial specified value or less
Endurance*	After 2000 hours' application of rated voltage in series with a 3Ω resistor at 85˚C,or derated voltage in series with a 3Ω resistor at 125˚C,capacitors meet the characteristic requirements listed below. Capacitance Change ····· Within ±10% of initial value Dissipation Factor ····· Initial specified value or less Leakage Current ····· Initial specified value or less
Shear Test	After Applying the pressure load of 5N for 10 ± 1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on an aluminum substrate,there shall be found neither exfoliation nor its sign at the terminal electrode.  5N (0.51kg・f) For 10 ± 1 seconds
Terminal Strength	Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of the capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that the substrate may bend by 1mm as illustrated. Then,there shall be found no remarkable abnormality on the capacitor terminals.  R230　20　45　45　1mm

* As for the surge and derated voltage at 125˚C, refer to page 266 for details.

F97

Standard ratings

Rated Volt	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Disspation Factor (%@120Hz)	ESR (Ω@100kHz)
4V	3.3	A	F970G335MAA	0.5	6	4.5
	4.7	A	F970G475MAA	0.5	6	4.0
	6.8	A	F970G685MAA	0.5	6	3.5
	10	B	F970G106MBA	0.5	6	2.1
	15	B	F970G156MBA	0.6	6	2.0
	22	B	F970G226MBA	0.9	6	1.9
	33	C	F970G336MCC	1.3	6	1.1
	47	C	F970G476MCC	1.9	6	0.9
	68	C	F970G686MCC	2.7	6	0.8
	68	N	F970G686MNC	2.7	6	0.6
	100	N	F970G107MNC	4.0	8	0.6
	150	N	F970G157MNC	6.0	8	0.6
6.3V	2.2	A	F970J225MAA	0.5	6	5.0
	3.3	A	F970J335MAA	0.5	6	4.5
	4.7	A	F970J475MAA	0.5	6	4.0
	6.8	B	F970J685MBA	0.5	6	2.5
	10	B	F970J106MBA	0.6	6	2.1
	15	B	F970J156MBA	0.9	6	2.0
	22	C	F970J226MCC	1.4	6	1.1
	33	C	F970J336MCC	2.1	6	1.1
	47	C	F970J476MCC	3.0	6	0.9
	47	N	F970J476MNC	3.0	6	0.7
	68	N	F970J686MNC	4.3	6	0.6
	100	N	F970J107MNC	6.3	8	0.6
10V	1.5	A	F971A155MAA	0.5	4	6.0
	2.2	A	F971A225MAA	0.5	6	5.0
	3.3	A	F971A335MAA	0.5	6	4.5
	4.7	B	F971A475MBA	0.5	6	2.8
	6.8	B	F971A685MBA	0.7	6	2.5
	10	B	F971A106MBA	1.0	6	2.0
	15	C	F971A156MCC	1.5	6	1.2
	22	C	F971A226MCC	2.2	6	1.1
	33	C	F971A336MCC	3.3	6	1.1
	33	N	F971A336MNC	3.3	6	0.7
	47	N	F971A476MNC	4.7	6	0.7
16V	1	A	F971C105MAA	0.5	4	7.5
	1.5	A	F971C155MAA	0.5	4	6.3
	2.2	A	F971C225MAA	0.5	6	5.0
	3.3	B	F971C335MBA	0.5	6	3.1
	4.7	B	F971C475MBA	0.8	6	2.8
	6.8	B	F971C685MBA	1.1	6	2.5
	10	C	F971C106MCC	1.6	6	1.5
	15	C	F971C156MCC	2.4	6	1.2
	22	C	F971C226MCC	3.5	8	1.1
	22	N	F971C226MNC	3.5	6	0.7
	33	N	F971C336MNC	5.3	6	0.7
20V	0.68	A	F971D684MAA	0.5	4	7.6
	1	A	F971D105MAA	0.5	4	7.5
	1.5	A	F971D155MAA	0.5	6	6.7
	2.2	B	F971D225MBA	0.5	6	3.8
	3.3	B	F971D335MBA	0.7	6	3.1
	4.7	B	F971D475MBA	0.9	6	2.8
	6.8	C	F971D685MCC	1.4	6	1.8
	10	C	F971D106MCC	2.0	6	1.5
	15	N	F971D156MNC	3.0	6	0.7
	22	N	F971D226MNC	4.4	6	0.7

Rated Volt	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Disspation Factor (%@120Hz)	ESR (Ω@100kHz)
25V	0.47	A	F971E474MAA	0.5	4	10.0
	0.68	A	F971E684MAA	0.5	4	7.6
	1	A	F971E105MAA	0.5	4	7.5
	1.5	B	F971E155MBA	0.5	4	4.0
	2.2	B	F971E225MBA	0.6	6	3.8
	3.3	B	F971E335MBA	0.8	6	3.5
	4.7	C	F971E475MCC	1.2	6	1.8
	6.8	C	F971E685MCC	1.7	6	1.8
	10	C	F971E106MCC	2.5	6	1.6
	10	N	F971E106MNC	2.5	6	1.0
	15	N	F971E156MNC	3.8	6	0.7
35V	0.33	A	F971V334MAA	0.5	4	12.0
	0.47	A	F971V474MAA	0.5	4	10.0
	0.68	A	F971V684MAA	0.5	4	7.6
	1	B	F971V105MBA	0.5	4	4.0
	1.5	B	F971V155MBA	0.5	6	4.0
	2.2	B	F971V225MBA	0.8	6	3.8
	3.3	C	F971V335MCC	1.2	6	2.0
	4.7	C	F971V475MCC	1.6	6	1.8
	6.8	N	F971V685MNC	2.4	6	1.0
	10	N	F971V106MNC	3.5	6	1.0